


INSTALLATION DETAIL

ROUGH OPENING:

Door Dimensions will be exactly your door size with a frame.
 Recommended rough opening is between 3/4" (19mm) - 1" (25mm) larger than the Door width and height.
 Ensure that the rough opening is plumb, level and square, and the walls in the opening are not twisted.

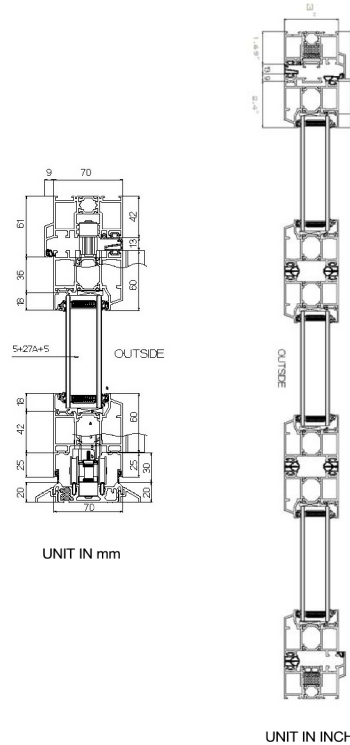

TITLE 24


FOSHAN YT Aluminum Co., Ltd. 15# CHINA	
Double Glazing, Argon Gas, Low E 2018 AIA GREENGUARD	
ENERGY PERFORMANCE RATINGS	
U-Value U1 (J/ft²·h·°F)	Shade Heat Gain Coefficient
0.30	0.29
ADDITIONAL PERFORMANCE RATINGS	
Visible Transmittance	
0.51	

GLASS DETAILS

- DOUBLE TEMPERED GLASS
- EACH PANE 5MM GLASS
- E GLASS 100% BLOCK UV
- FILLED WITH ARGON GAS
- 5mm GLASS PANE + 27mm ARGON GAS+ 5MM GLASS PANE



BOTTOM TRACK DETAIL

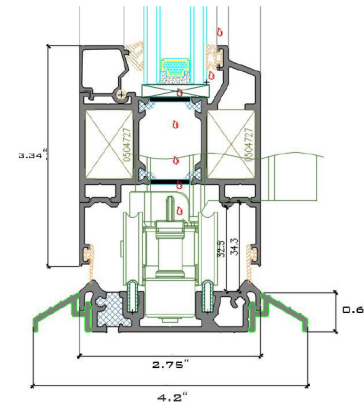

PROJECT

DOOR TYPE

75 Series Bifold Doors Specification

Notes

1. All dimensions are in feet & inches.
2. All dimensions are to be checked on site.
3. Any discrepancy between the architectural drawing and other drawings relevant for construction should be notified before commencement.